



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 612 175 A2**

12

EUROPEAN PATENT APPLICATION

21 Application number: **94300492.9**

51 Int. Cl.⁵: **H04L 25/14, H04L 25/49**

22 Date of filing: **24.01.94**

30 Priority: **19.02.93 US 20038**

43 Date of publication of application:
24.08.94 Bulletin 94/34

64 Designated Contracting States:
DE FR GB IT SE


71 Applicant: **HEWLETT-PACKARD COMPANY**
3000 Hanover Street
Palo Alto, California 94304-1181 (US)

72 Inventor: **Thaler, Patricia A.**
5025 Keane Drive
Carmichael, California 95608 (US)
Inventor: **Jedwab, Jonathan**
53 South Parade Mansions,
Oakfield Road
Clifton, Bristol BS8 2BA (GB)

74 Representative: **Coker, David Graeme et al**
Hewlett-Packard Limited
Intellectual Property Section,
Building 2,
Filton Road
Bristol BS12 6QZ (GB)

54 Line coding for split channel transmission.

57 Data to be communicated over a plurality of channels are divided into blocks (A1,B1,C1,D1,A2,B2,...), and each successive block is transmitted along a different channel (A,B,C,D) on a cyclic basis. A 5-to-6 bit coding scheme is used with some data values having one possible encoding, with three binary ones, and the remainder having two possible encodings, one with two binary ones and the other with four binary ones. To maintain d.c. balance on each channel, two-ones and four-ones encodings are used alternately for successive occurrences on a channel of any data value having dual encodings. To assist detection of single-bit errors affecting the encoded data, a delimiter having one of two possible values is sent after the final block on each channel; this delimiter value is chosen in accordance with which encoding would have been selected if another dual-encoding data value had occurred on that channel.

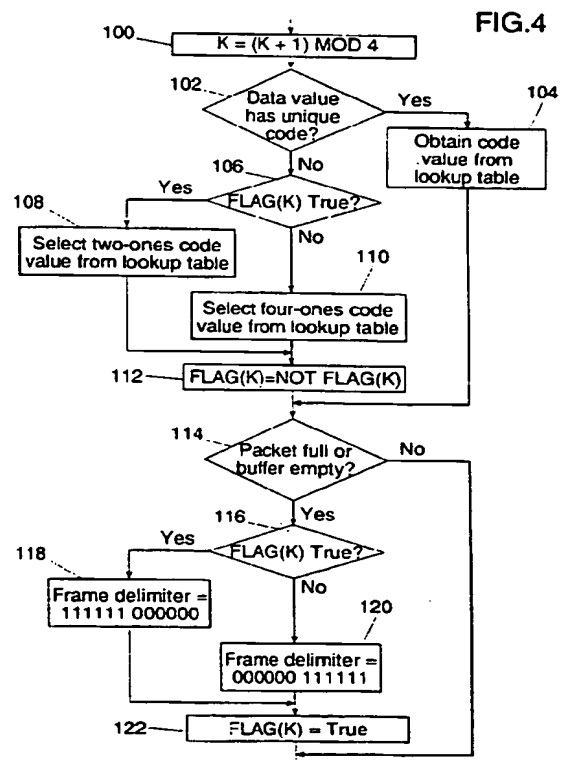

EP 0 612 175 A2

Technical Field

This invention relates to methods and systems for communicating data, and particularly, though not exclusively, to methods and systems for communicating data over a plurality of channels, such as a cable having a plurality of conductors (for example a four-wire telephone cable).

Background Art

The spread of personal computers and workstations has led to the development of networks for interconnecting such equipment and common resources such as printers and data storage devices. More powerful and sophisticated computing equipment and programs have progressively become available, allowing the processing of data in larger and larger quantities, for example in the form of database information and graphic images. These developments have in turn placed increasing demands on the speed and capacity of networks.

Various new networking technologies have been proposed to cater for these demands. One such technology is the fibre distributed data interface (FDDI), which is based on the use of optical fibres and optical signals. However, practical experience has shown that although this technology can provide the required performance, it is relatively expensive, requiring the costly process of installing complete new networks of optical fibre, which is itself inherently expensive.

Accordingly attention has also been directed to the possibility of transferring data at high speed over existing wiring installations, thereby avoiding the cost of installing a new network and gaining additional return for the expense previously incurred in installing the existing wiring.

One possible technique along these lines involves the use of unshielded twisted-pair (UTP) telephone cables of the kind already used for lower-speed local-area networks. In this technique, described for example in US Patent 5 119 402, the required high data rate is achieved by transferring the data over multiple conductors, so that different portions of the data are transmitted simultaneously over respective conductors.

In data communication systems it is desirable to ensure a high degree of error detection. One particular class of errors is those affecting individual, spaced bits. Such errors are known as single-bit errors. Various techniques have been developed for the detection of single-bit errors, including cyclic redundancy check (CRC) codes and the encoding of data values using a limited number of valid code words. However, there remain certain combinations of single-bit errors which such techniques may not detect.

It is an object of this invention to provide a method and system for communicating data, for example using cables with multiple conductors, which facilitates the detection of single-bit errors.

Disclosure of Invention

According to one aspect of this invention there is provided a method for communicating encoded data over a channel, using a code having two groups of data values, each data value in a first group having one or more code words all of weight n (weight being calculated as described below), and each data value in a second group having a plurality of code words each of which is of weight $n+x$ (e.g. $n-1$) or $n+y$ (e.g. $n+1$) and having at least one code word of each weight, code words of weight $n+x$ and $n+y$ being selected alternately upon each occurrence of any data value in said second group, wherein communication of data over said channel is terminated with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring in place of said delimiter.

Digital data is commonly communicated physically by transmitting different respective voltages for different digital values. Thus, in a binary system +2.5 volts may represent a binary 1 and -2.5 volts may represent a binary 0; in a ternary (three-level) system +2.5 volts may represent a ternary 1, 0 volts may represent a ternary 0, and -2.5 volts may represent a ternary -1. In an a.c. coupled communication system it is generally desired to maintain d.c. balance, i.e. to avoid any long-term departure of cumulative signal voltage from an equilibrium value. This may be accomplished by the use of a code in which the cumulative weight (as described below) of the code words does not depart from some predetermined value by more than some predetermined limit.

As used herein, the term 'weight' refers to the relative numbers of differently valued symbols in a code word. Thus, in a binary system, the weight may refer to the number of binary 1's in a code word relative to some reference quantity. For example, a code word 111000 may be considered to have a weight (expressed as number of 1's above or below three) of 0, a code word 001100 to have a weight of -1 and a code word 110011 to have a weight of +1.

In a ternary system, the weight may be expressed, for example, as the sum of the symbol values in a code word, the three possible symbol values being -1, 0 and +1.

According to another aspect of this invention there is provided apparatus for communicating encoded data over a channel, using a code having two groups of data values, each data value in a first group having one or more code words all of weight n , and each data value in a second group having a plurality of code words each of which is of weight $n+x$ or $n+y$ and having at least one code word of each weight, comprising:

- 5 means for encoding data values in said first group;
- means for selecting code words of weight $n+x$ and $n+y$ alternately upon each occurrence of any data value in said second group; and
- means for terminating communication of data over said channel with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring in place of said delimiter.

Brief Description of Drawings

A method and system in accordance with this invention for communicating data using four-conductor unshielded twisted-pair cable will now be described, by way of example, with reference to the accompanying drawings, in which:

- Figures 1 and 2 show the manner in which data is formatted for communication over the cable;
- Figure 3 is a table of five-bit data values and corresponding six-bit code values;
- Figure 4 is a flow diagram of a method for encoding data blocks according to the table in Figure 3, and for delimiting data; and
- 20 Figure 5 is a flow diagram of a method for checking received encoded data blocks for errors.

Best Mode for Carrying Out the Invention, & Industrial Applicability

25 The present invention may be used, for example, in circumstances where a stream of data is communicated over a plurality of channels, successive portions of the data stream being communicated simultaneously over different respective channels in order to obtain a higher bandwidth than would be possible if all the data were transmitted over a single such channel. For convenience the invention will be described in the context of transmission of binary data over a cable having four channels or conductors (e.g. four pairs of twisted wires). However, the invention is not limited to this particular number of channels nor to this type of channel nor to binary data. In practice the cable would, for example, form part of a network connecting many stations or nodes, such as personal computers, workstations, multi-user computers, printers or data storage units. Circuit devices associated with these stations would provide the necessary functions for assembling data and network operating information into frames or packets for transmission, for controlling access to the network and for transmitting and receiving physical signals on the cable (for example by differential signalling in the case of twisted-pair conductors). The present invention is independent of the particular details of these functions and may for example be implemented in conjunction with existing network technologies; since such technologies already incorporate known techniques for providing these functions, and the functions form no part of the present invention, they will not be described here.

40 Referring to Figures 1 and 2, a data frame intended to be communicated over a four-conductor cable is shown schematically at 10. This frame comprises a binary digital message 12 to be transferred, starting with the leftmost bit as shown in Figure 1, between stations on the network; and an associated thirty-two bit CRC (cyclic redundancy check) block 14 containing check data derived from the message 12 in known manner in accordance with a predetermined CRC algorithm, such as that based on the polynomial

$$45 \quad g(x) = x^{32} + x^{28} + x^{23} + x^{22} + x^{16} + x^{12} + x^{11} + x^{10} + x^8 + x^7 + x^5 + x^4 + x^2 + x + 1.$$

For transmission over the four-conductor cable the data frame is split into consecutive blocks of five bits each, and the blocks are distributed among the four conductors (herein labelled A to D) on a cyclic basis and starting with the block containing the leftmost bit of the data frame. Thus the first block, labelled A1 in Figure 1, is transmitted via conductor A, the next block (B1) via conductor B, the third block (C1) via conductor C and the fourth (D1) via conductor D. The cycle then repeats, with conductor A being used again, for the fifth block (A2), and so on.

Prior to transmission the five-bit data blocks are encoded by a 5-to-6 bit encoder 16 (Figure 2) into six-bit values according to a substitution table, to provide a measure of inherent error detection. The encoding substitutions may be as shown in Figure 3. These particular substitutions are selected in part to maintain d.c. balance on each conductor, by ensuring that after transmission of each coded data block the accumulated weight, as described above, is always in the range -1 to +1. Thus, in the example shown in Figure 3, a first group of twenty substitutions (the centre column of the 6-bit code table) are assigned unique codes comprising respective ones of the twenty six-bit values which contain three binary zeroes and three binary ones

(weight=0). The remaining twelve data values form a second group which are each assigned two possible six-bit code values, one containing two binary ones (weight=-1) and the other containing four (weight=+1), as shown in the left and right columns of the 6-bit code table.

The encoding is implemented so that on the first occasion in a frame that one of the second group of twelve data blocks occurs for transmission along a particular conductor, the corresponding two-ones encoding is selected (left-hand column); on the next occasion that any of these twelve data blocks occurs for transmission along that same conductor, the corresponding four-ones encoding is used (right-hand column); thereafter the use of the two-ones and four-ones encodings continues to alternate for each occurrence of any of the second group of data blocks in respect of that conductor. Thus for each conductor the numbers of two-ones and four-ones six-bit codes will differ at most by one, maintaining an average of three binary zeroes (zero weight) per six-bit code and providing the desired d.c. balance. In Figure 1 illustrative five-bit data blocks are indicated in bold characters, and corresponding six-bit code values are indicated below them in normal characters.

The particular set of substitutions given in Figure 3 is illustrative only; different combinations of five-bit data values and six-bit code values may be assigned as desired. Thus, for example, a code may be used in which there are two or more possible substitutions for every data value.

After encoding, the six-bit code values are distributed or 'de-multiplexed' by a de-multiplexer 18 among the four conductors A to D on a cyclic basis as described above. Thus, as shown in Figure 2, conductor A will carry encoded data blocks A1, A2, A3, etc. in succession (leftmost bit of each first), conductor B will carry encoded data blocks B1, B2, B3, etc., and likewise for conductors C and D. To improve resistance to noise bursts, data blocks are transmitted on conductors A and B coincidentally (or, in terms of overall blocks, in phase with each other), and offset from (or out of phase with) the data blocks transmitted coincidentally with one another on conductors C and D.

At the end of each frame of data, a twelve-bit end delimiter is transmitted on each conductor. This delimiter has two possible values: one value, identified as DL2 in Figure 2, has the binary value 11111000000; the other value, identified as DL4, has the binary value 00000111111. The particular values indicated are purely exemplary - they are chosen to be readily distinguishable from encoded data blocks, and values which maintain d.c. balance are preferred. The choice between these values for each conductor is determined by the weight of the code word most recently transmitted on that conductor for any one of the second group of twelve data values having two possible code values. If the most recently transmitted one of those data values was encoded with a code value having two binary ones (weight=-1), the DL4 delimiter is chosen; otherwise (or if no data value from the second group occurs during the frame on that conductor) the DL2 delimiter is used. (In the example shown in Figure 2, it is assumed that no further data values from the second group occur after data value B3.)

At the receiving end of the conductors A to D, a multiplexer 20 'multiplexes' the four signals to reconstruct the original encoded data stream, after compensating for the offset between the signals on conductors C and D and those on conductors A and B. A decoder 22 then converts each six-bit encoded block to derive the corresponding five-bit data block, and checks the CRC value. If the CRC value is invalid, or any six-bit encoded value is encountered which is invalid, or there is a violation for any conductor of the alternating pattern of encodings of weight +1 and -1 for data values in the second group, the decoder 22 rejects the entire data frame. Any departure from this alternating pattern, in encoded data values or in the end delimiter, indicates that at least one error has occurred.

The consistent use of a predetermined (e.g. two-ones) encoding as the choice for the first occurrence on each conductor of one of the second group of data values, and selection of an end delimiter value as described above, provide several advantages. Thus, it is possible to detect reliably an odd number of single-bit errors occurring on one or more conductors; in addition, some occurrences of an even number of single-bit errors on every conductor are detected. Error patterns which will be detected in this manner include some which will escape detection using CRC values and code violations. In particular, this invention, together with the code in Figure 3 for example, allows the detection of any combination of three single-bit errors within a single frame.

Thus, if a single-bit error affects an encoded data block of weight 0, that data block will be changed either to an invalid code value, or to one of the valid code words of weight +1 or -1. The first possibility is inherently and immediately detectable as being an error; the second will cause an extra occurrence of a code word of weight +1 or -1, thereby disrupting the regular alternating pattern of encodings of weight +1 and -1, and so will also be detectable.

If a single-bit error affects an encoded data block of weight +1 or -1, it will likewise be changed either to an entirely invalid code word of weight +2 or -2, or to a code word of weight 0. The first possibility is again inherently detectable as an error; the second will cause one occurrence of a code word of weight +1 or -1 to disappear, again disrupting the regular alternating pattern.

Figure 4 shows a flow diagram of a method for implementing the encoding and choice of end delimiter.

This procedure uses four boolean flags, one for each conductor, which are set to 'true' at the start of each frame.

Referring to Figure 4, at step 100 a counter K is incremented according to the relationship

$$K = (K + 1) \text{ modulo } 4$$

5 so that the counter cyclically takes on the values zero to three inclusive. The purpose of this counter is to keep track of which conductor the current (encoded) data value will be transmitted along. At step 102 the data value to be encoded is tested to check whether it has one or two corresponding six-bit code values. If there is a unique corresponding code value, the procedure obtains that value from a look-up table at step 104 and advances to step 114, described below. Otherwise the procedure advances to step 106, where one of the above-mentioned
10 boolean flags, selected in accordance with the current value of the counter K, is tested. If the flag is 'true', the procedure selects the code value containing only two binary ones, at step 108; if the flag is 'false' the code value containing four ones is selected, at step 110. In either case the procedure then inverts the value of the flag at step 112.

At step 114 the procedure tests whether the current frame is full (i.e. the prescribed maximum size for a
15 frame has been attained) and whether a data buffer from which data is taken for encoding is empty. If neither of these circumstances applies, the procedure exits for transmission of the encoded data block. If either test is satisfied, the current frame is completed and an end delimiter must be selected. Accordingly, at step 116, the relevant one of the above-mentioned four boolean flags, selected in accordance with the current value of the counter K, is tested. If the flag is 'true', the procedure selects the DL2 delimiter (11111000000), at step
20 118; if the flag is 'false' the DL4 delimiter (00000011111) is selected, at step 120. In either case the procedure then resets the value of the flag at step 122 to 'true' in preparation for the following frame.

Figure 5 shows a procedure, similar to that of Figure 4, for use in the decoder 22 to track the alternating pattern of encodings of weight +1 and -1, and verify that the pattern has been correctly maintained in the received data stream. Like the procedure in Figure 4, this procedure uses four boolean flags, one for each conductor,
25 which are set to 'true' at the start of each frame.

Referring to Figure 5, at step 200 a counter L is incremented in a similar manner to the counter K in Figure 4, to keep track of which conductor the current (encoded) data value was transmitted along. The next step, 201, tests whether the current code value is the start of an end delimiter (111111 or 000000). If so, the procedure advances to step 216, described below. Otherwise, at step 202 the code value is tested to check whether it
30 contains three binary 1's. If it does, the procedure obtains the corresponding data value from the look-up table at step 204. Otherwise the procedure advances to step 206, where one of the above-mentioned boolean flags, selected in accordance with the current value of the counter L, is tested. If the flag is 'true', the procedure advances to step 208 where the code value is tested to check whether it contains only two binary ones; if the flag is 'false' the code value is tested to check if it contains four ones, at step 210. If the selected test fails, the
35 procedure indicates an error, at step 224. Otherwise the procedure inverts the value of the flag, at step 212, and then decodes the code value at step 204.

When an end delimiter is found, the relevant one of the four boolean flags, selected in accordance with the current value of the counter L, is tested at step 216. If the flag is 'true', the procedure tests whether the end delimiter has the DL2 value (111111000000), at step 218; if the flag is 'false' the delimiter is tested for the
40 DL4 value (000000111111), at step 220. If the relevant test fails, the procedure indicates an error at step 224. Otherwise the value of the flag is reset at step 222 to 'true' in preparation for the following frame.

Claims

45

1. A method for communicating encoded data over a channel, using a code having two groups of data values, each data value in a first group having one or more code words all of weight n , and each data value in a second group having a plurality of code words each of which is of weight $n+x$ or $n+y$ and having at least one code word of each weight, code words of weight $n+x$ and $n+y$ being selected alternately upon each
50 occurrence of any data value in said second group, wherein communication of data over said channel is terminated with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring in place of said delimiter.

55

2. The method of claim 1, wherein x has a value of -1.

3. The method of claim 1 or claim 2, wherein y has a value of 1.

4. The method of any one of the preceding claims, wherein each data value in said first group has one code word, and each data value in said second group has one code word of weight $n+x$ and one code word of weight $n+y$.
5. The method of any one of the preceding claims, wherein said data values are 5-bit data words which are encoded using the code words in the table of Figure 3.
6. The method of any one of the preceding claims, wherein said predetermined delimiter values are 111111000000 and 000000111111.
7. The method of any one of the preceding claims, wherein data are transmitted over a plurality of channels, wherein communication of data over each respective channel is terminated with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring on that channel in place of said delimiter.
8. Apparatus for communicating encoded data over a channel, using a code having two groups of data values, each data value in a first group having one or more code words all of weight n , and each data value in a second group having a plurality of code words each of which is of weight $n+x$ or $n+y$ and having at least one code word of each weight, comprising:
 - means for encoding data values in said first group;
 - means for selecting code words of weight $n+x$ and $n+y$ alternately upon each occurrence of any data value in said second group; and
 - means for terminating communication of a packet over said channel with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring in place of said delimiter.
9. The apparatus of claim 8, wherein x has a value of -1.
10. The apparatus of claim 8 or claim 9, wherein y has a value of 1.
11. The apparatus of any one of claims 8 to 10, wherein each data value in said first group has one code word, and each data value in said second group has one code word of weight $n+x$ and one code word of weight $n+y$.
12. The apparatus of any one of claims 8 to 11, wherein said data values are 5-bit data words and including means for encoding said data values in accordance with the table of Figure 3.
13. The apparatus of any one of claims 8 to 12, wherein said predetermined delimiter values are 111111000000 and 000000111111.
14. The apparatus of any one of claims 8 to 13, wherein data are transmitted over a plurality of channels, and including means for terminating communication of data over each respective channel with a delimiter selected from at least two predetermined delimiters in accordance with the weight which would be selected for a code word corresponding to a data value in said second group and occurring on that channel in place of said delimiter.

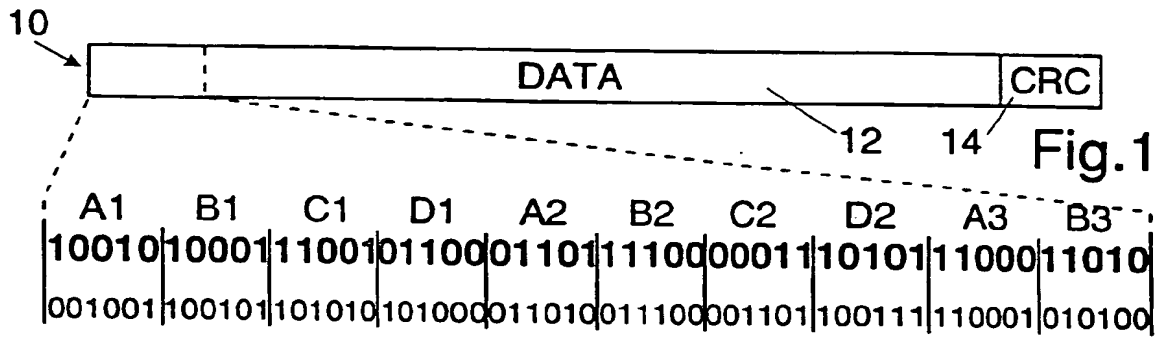


Fig.1

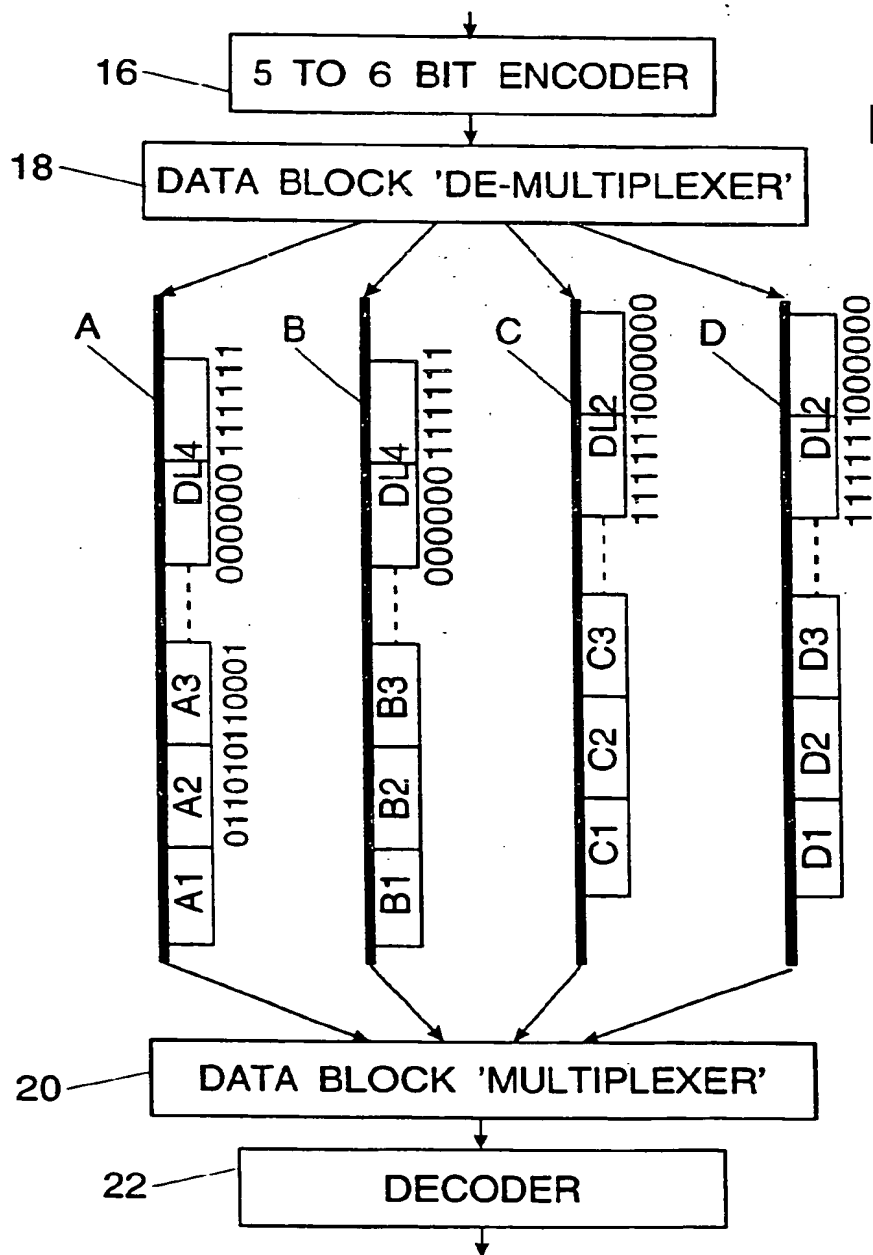


Fig.2

Fig.3

<u>5-bit data word</u>	<u>6-bit code</u>	
00000	001100	110011
00001		101100
00010	100010	101110
00011		001101
00100	001010	110101
00101		010101
00110		001110
00111		001011
01000		000111
01001		100011
01010		100110
01011	000110	111001
01100	101000	010111
01101		011010
01110	100100	011011
01111		101001
10000	000101	111010
10001		100101
10010	001001	110110
10011		010110
10100		111000
10101	011000	100111
10110		011001
10111	100001	011110
11000		110001
11001		101010
11010	010100	101011
11011		110100
11100		011100
11101		010011
11110	010010	101101
11111		110010

FIG.4


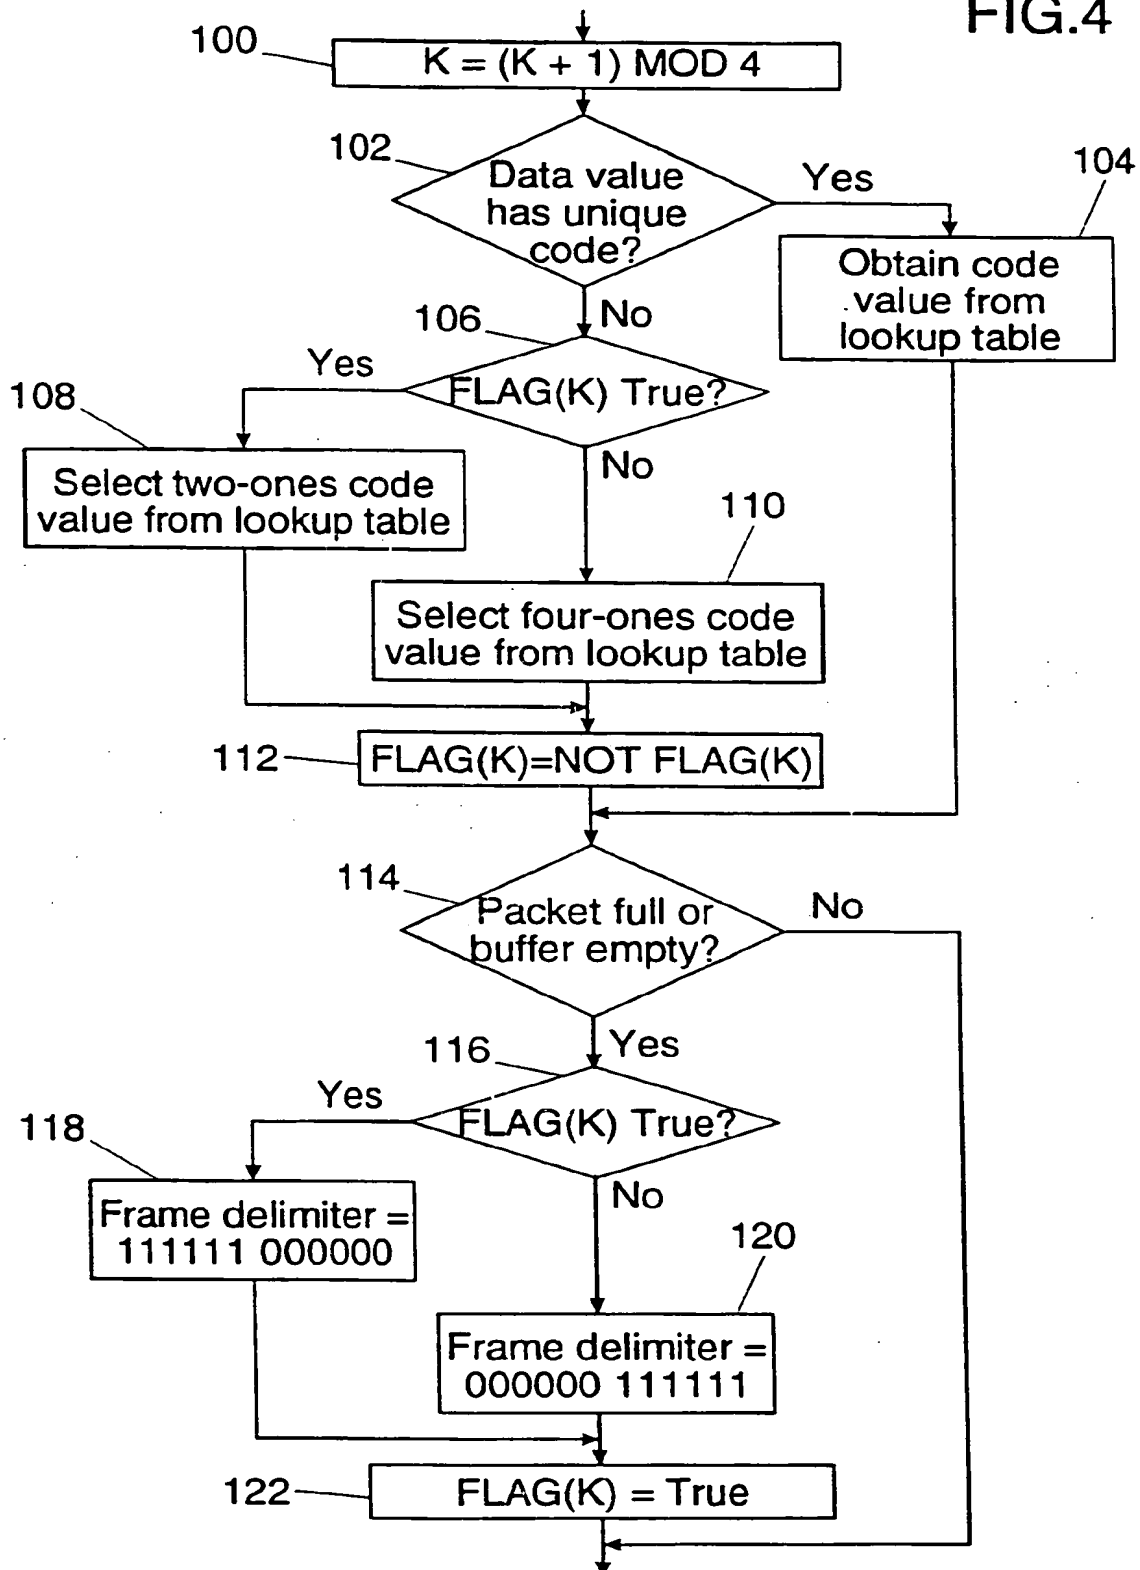


FIG.5



(19)

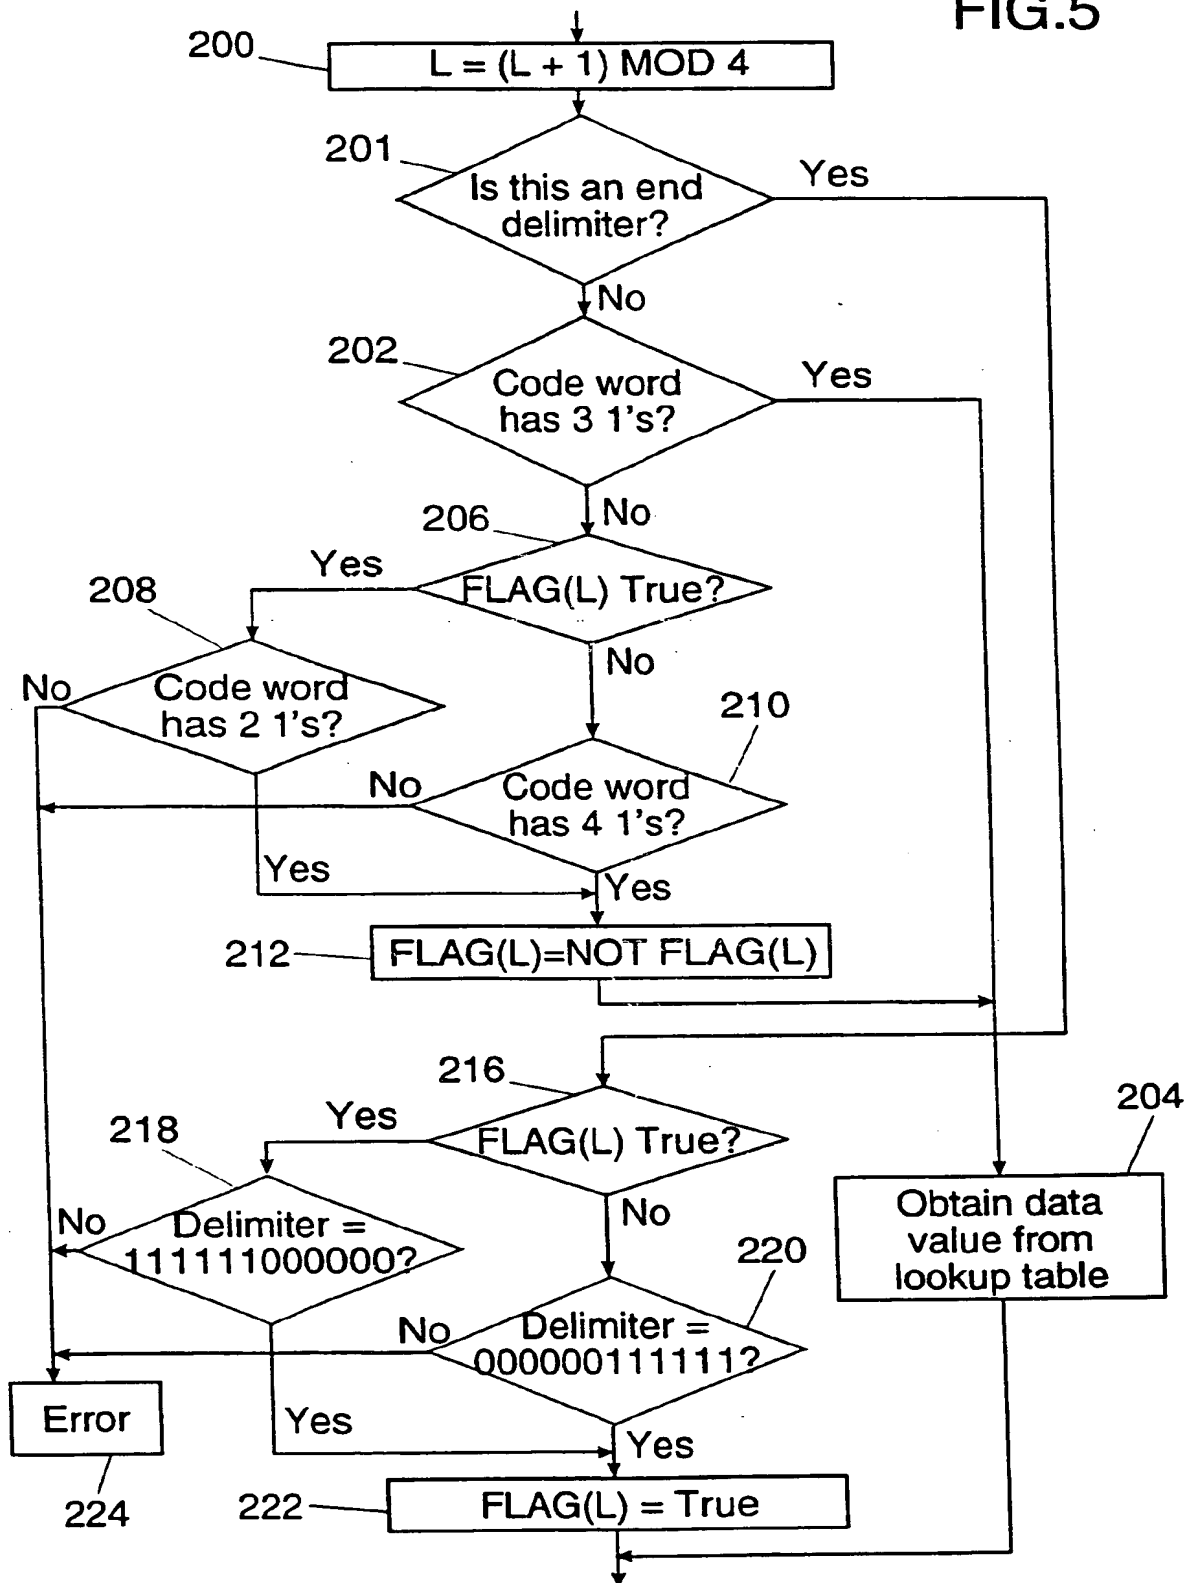

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 612 175 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
10.01.1996 Bulletin 1996/02

(51) Int Cl.⁶: H04L 25/14, H04L 25/49

(43) Date of publication A2:
24.08.1994 Bulletin 1994/34

(21) Application number: 94300492.9

(22) Date of filing: 24.01.1994

(84) Designated Contracting States:
DE FR GB IT SE

(30) Priority: 19.02.1993 US 20038

(71) Applicant: HEWLETT-PACKARD COMPANY
Palo Alto, California 94304-1181 (US)


(72) Inventors:

- Thaler, Patricia A.
Carmichael, California 95608 (US)
- Jedwab, Jonathan
Clifton, Bristol BS8 2BA (GB)

(74) Representative: Coker, David Graeme et al
Bristol BS12 6QZ (GB)

(54) Line coding for split channel transmission

(57) Data to be communicated over a plurality of channels are divided into blocks (A1,B1,C1,D1,A2,B2,...), and each successive block is transmitted along a different channel (A,B,C,D) on a cyclic basis. A 5-to-6 bit coding scheme is used with some data values having one possible encoding, with three binary ones, and the remainder having two possible encodings, one with two binary ones and the other with four binary ones. To maintain d.c. balance on each channel, two-ones and four-ones encodings are used alternately for successive occurrences on a channel of any data value having dual encodings. To assist detection of single-bit errors affecting the encoded data, a delimiter having one of two possible values is sent after the final block on each channel; this delimiter value is chosen in accordance with which encoding would have been selected if another dual-encoding data value had occurred on that channel.

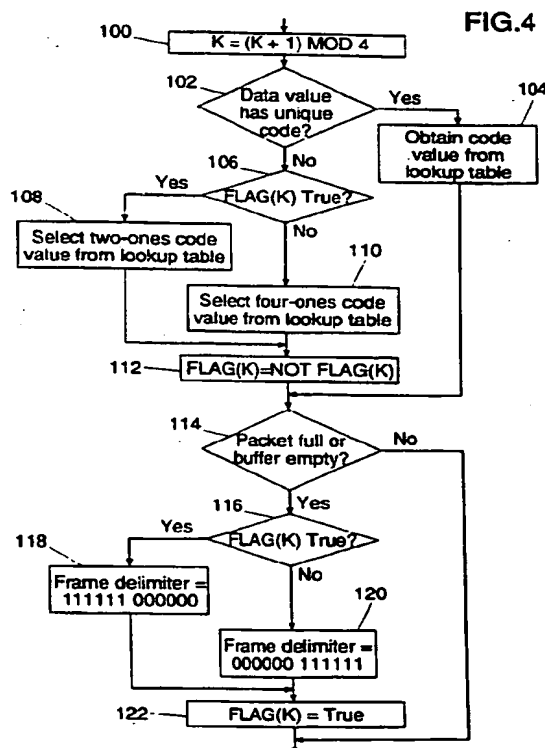

EP 0 612 175 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 0492

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. CLS)
X	FR-A-2 469 046 (SONY) 8 May 1981 * figures 3,5 * * page 10, line 36 - page 11, line 16 *	1-5,8-12	H04L25/14 H04L25/49
Y	---	7,14	
Y	GB-A-2 191 662 (HITACHI) 16 December 1987 * abstract; figure 1 * * page 1, line 61 - line 89 *	7,14	
E	EP-A-0 596 736 (HEWLETT PACKARD) 11 May 1994 * the whole document *	1-14	
			TECHNICAL FIELDS SEARCHED (Int. CLS)
			H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 7 November 1995	Examiner Scriven, P
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: prior art disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons Δ: member of the same patent family, corresponding document			

EPO FORM 150 (01.92) (Pecv)